



MASTER AnchorSM

SDOS

SUPER DUTY WITH OFF SET

The World's Strongest FastenerSM

- NEVER Loosens!
- Installs in ALL Hollow Walls - in just minutes!
- Rated up to 300 lbs. in drywall
- Handles vector forces 360°
- Objects can be easily removed or replaced



DRILL IT. INSTALL IT. MOUNT IT.
Fire Retardant, Structural Plastic & Stainless Steel Construction

as seen on



MADE WITH PRIDE IN THE U.S.A.

PART # - MAW35SDOS

Sold in Set of 2, Bulk 24, or Bulk 100



OVER TWO MILLION
2,000,826
INSTALLED.
AND STILL COUNTING...

- For installation where mounting hole is less than 1/2" from the edge
- Great for mounting brackets for partitions
- Superior design - easy install every time
- Use #10 screw for maximum strength and integrity
- Safe for outdoor and indoor use
- Can even be used in holes created when other fasteners fail!
- All Master Anchors are easily installed with the Apache200 3/4" Drill Bit

FOR SALES & SUPPORT CONTACT GENERAL PARTITIONS AT 814-833-1154

Visit us at www.generalpartitions.com • Email us at mikez@generalpartitions.com




MASTER ANCHOR WINGITS—MAW35 WORLD'S STRONGEST FASTENER!



Congratulations! You are using the World's Strongest Wall Fastening System. MASTER Anchors will not loosen over time OR from directional forces.

PARTS—Stainless Steel Screw; Tape; Structural, Fire Retardant Plastic Faceplate and Wing — (Optional Stainless Steel Hook Plate may also be included.)

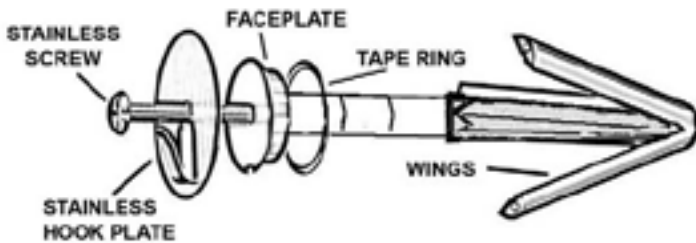


Install Instructions:

⇒ Watertight application—peel Tape Ring off liner, place Tape on Faceplate and remove paper cover.

⇒ For mirrors and pictures, use the optional Stainless Hook Plate




Surface Preparation—Determine where to install MAW—Drill $\frac{3}{4}$ " hole using the Apache200 (rated 200 holes in ceramic wall tile). **The standard MASTER Anchor is used in wall substrates up to 1.3" thick - call for other sizes.**

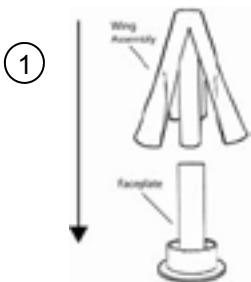


1. Insert the WINGS into the FACE-PLATE (the tubes interlock).




2. Extend the WingIt to full Length.




3. Compress and insert the WINGS into the holes.

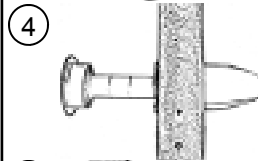

4. WINGS should be FLUSH with the wall surface.

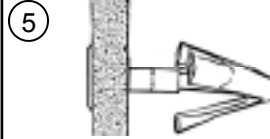

5. Pop WingIt through the hole by pushing on the Faceplate.

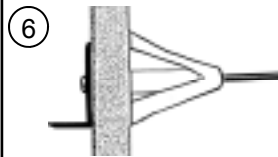

6. Using the enclosed 3.5" Stainless Steel Screw, Attach the grab bar to the WingIt.

NOTE—for individual mounting points where the Object will be subject to considerable torque (rotational forces) - use at least two MASTER Anchors.

Note: Strength and stability are greatly affected by projection off the wall surface and the length of interaction with the wall surface. Call us @ 877.894.6448 for guidance.

WingIts are designed to be used in vertical walls only—DO NOT USE IN CEILINGS.

Typical Uses include but not limited to:

- ALL KINDS OF ACCESSORIES AND DISPENSERS, BRACKETS,
- BATHROOM ACCESSORIES, CLOSET RACKS, COAT HOOKS,
- CLOCKS, DOOR BUMPERS, DIAPER CHANGING TABLES,
- EMERGENCY LIGHTING, FIRE EXTINGUISHERS
- GARMENT BAG HOOKS, HAND DRYERS, HEAD BOARDS,
- IRONS AND IRONING BOARDS, JUMBO PICTURES,
- KICK PLATES AND KICK RAILS, LIGHTING—WALL LIGHTS AND
- SCONCES, MIRRORS, MEDICINE CABINETS, MAIL BOXES,
- NEON SIGNAGE, PICTURES, RACKS—TOWEL,
- SHOWER RODS, SIGNS, SHELF—TOWEL,
- TOWEL BARS, TELEPHONES, TOWEL WARMERS
- WINDOW TREATMENTS

Call General Partitions @ 814.833.1154 to review specific installations.

Use the OFFSET MASTER Anchor when the hole in the Object being mounted is less than $\frac{1}{2}$ " from the edge of the Object. This will allow the FACEPLATE to be completely concealed by the Object.



1702 Peninsula Drive • Erie, PA 16505-4243
P.O. Box 8370 • Erie, PA 16505-0370
Phone 814/833-1154 • Fax 814/838-3473
Website <http://www.generalpartitions.com>
email:mikez@generalpartitions.com